


FB-090 青铜轴套规格及公差 FB-090 Bronze Sleeve Bushing Specification & Tolerance

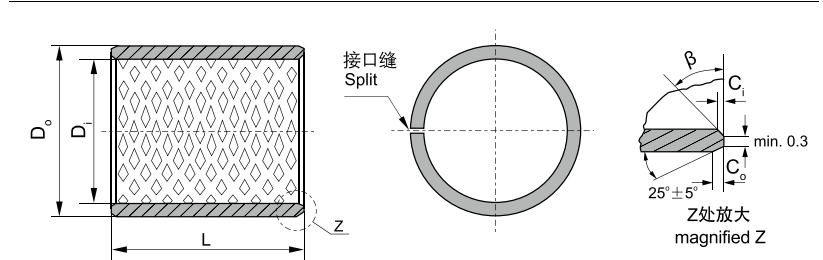

内外倒角 ID and OD chamfers

S_3	C_o	C_i	β	S_3	C_o	C_i	β
0.75	0.5 ± 0.3	0.25 ± 0.2	$35^\circ \pm 5^\circ$	2.00	1.2 ± 0.4	0.50 ± 0.3	$35^\circ \pm 5^\circ$
1.00	0.6 ± 0.3	0.30 ± 0.2	$35^\circ \pm 5^\circ$	2.50	1.8 ± 0.6	0.60 ± 0.3	$45^\circ \pm 5^\circ$
1.50	0.7 ± 0.3	0.50 ± 0.3	$35^\circ \pm 5^\circ$				

单位Unit: mm

内径 D_i ϕd	外径 D_o ϕD	0 -0.40												
		15	20	25	30	35	40	50	60	70	80	90	100	
25	28	2515	2520	2525	2530									
28	31	2815	2820	2825	2830									
30	34	3015	3020	3025	3030	3035	3040							
32	36	3215	3220	3225	3230	3235	3240							
35	39	3515	3520	3525	3530	3535	3540							
40	44		4020	4025	4030	4035	4040	4050						
45	50		4520	4525	4530	4535	4540	4550						
50	55		5020	5025	5030	5035	5040	5050	5060					
55	60		5520	5525	5530	5535	5540	5550	5560					
60	65			6025	6030	6035	6040	6050	6060	6070				
65	70				6530	6535	6540	6550	6560	6570				
70	75				7030	7035	7040	7050	7060	7070	7080			
75	80				7530	7535	7540	7550	7560	7570	7580			
80	85				8030	8035	8040	8050	8060	8070	8080			
85	90				8530	8535	8540	8550	8560	8570	8580	8590		
90	95				9030	9035	9040	9050	9060	9070	9080	9090		
95	100						9540	9550	9560	9570	9580	9590	95100	
100	105							10050	10060	10070	10080	10090	100100	
105	110							10550	10560	10570	10580	10590	105100	
110	115							11050	11060	11070	11080	11090	110100	
115	120							11550	11560	11570	11580	11590	115100	